


How to Wire Your Work

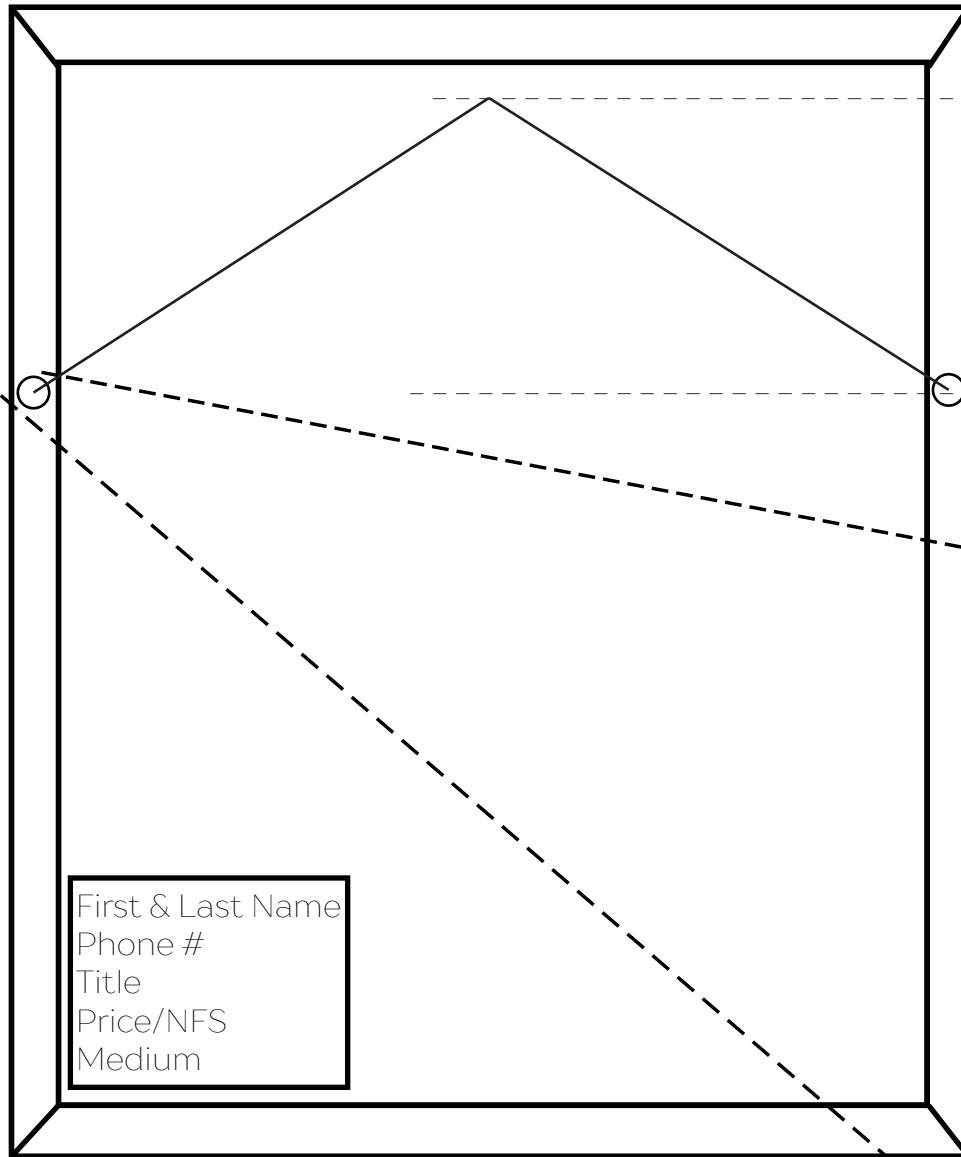

ex. 20 " x 24 "

When wire is pulled taught, the point should be at least 2" lower than the top of the frame

Your D rings or eye hooks should be down 1/3 the height of your piece the example here is 24" tall, therefore the D rings should be 8" down



-wire through the D ring from center of frame to outer edge of the frame



-pull through so you have a few inches of "tail"



-Loop up and under the initial threading, back toward the inside of the D ring,



through the D ring and back toward the center of the frame, finishing above the under loop



-YOU SHOULD STILL HAVE "TAIL" LEFT OVER

-Loop the remainder of the wire tightly around the "body" of the wire